



31.80601.63


Hydraulikscharnier Biloba für Saunas, Dampf- und Schwimmbäder

Material: aluminium
Finish: anodized 20 micron
Mounting: glass/wall
Glass thickness: 8 / 10 / 12 mm
Sales unit (SU): St
Unit package: 1.00
Carrying capacity: 100 kg/pair


mit Arretierung bei 0° und 90°, einstellbare Schliessgeschwindigkeit, max. Türbreite 1000mm



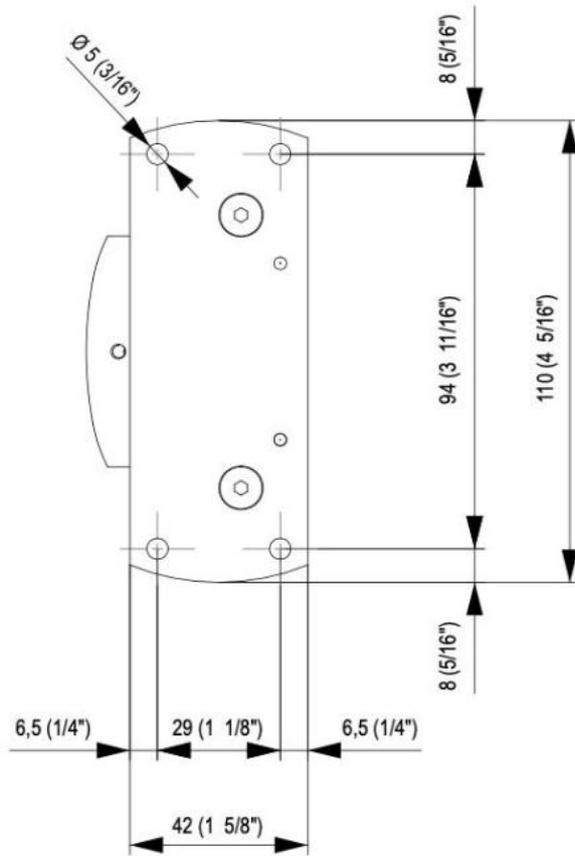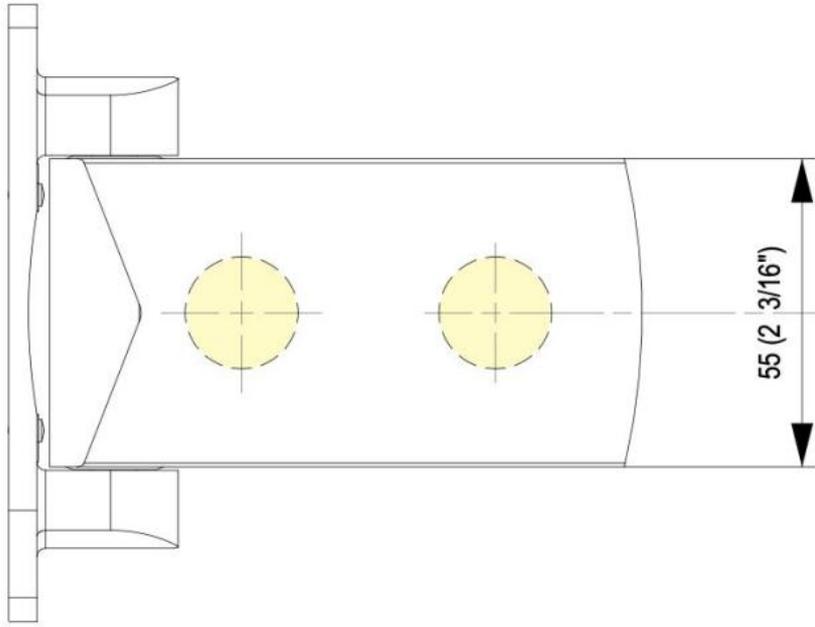

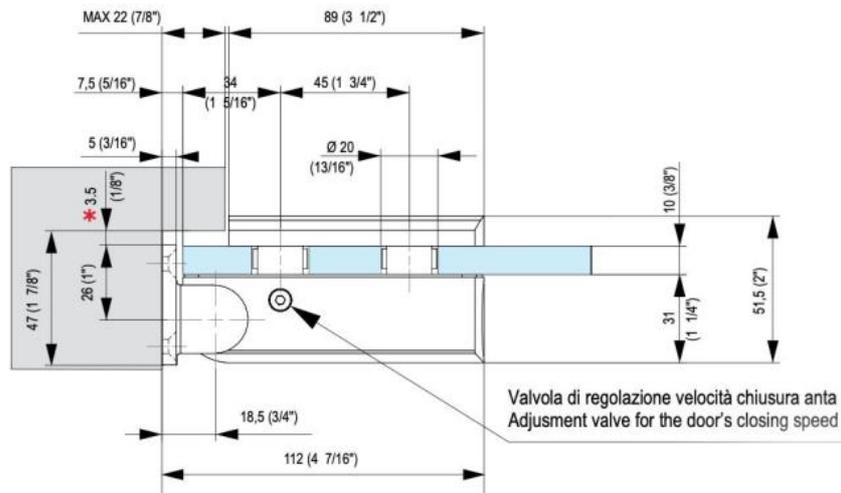

- * Distanza minima da filo muro per consentire rotazione vetro
 Distancia mínima de hilo pared, para facilitar la rotación del vidrio
 Minimum distance from wall edge in order to facilitate glass rotation
 Mindestdistanz von der Wandkante, um die Glasrotation zu erleichtern
 Distance minimum de l'arrête du mur pour permettre la rotation du verre

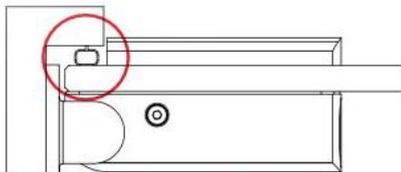

In caso di utilizzo guarnizione,
 considerarne l'ingombro.

Si utiliza el herraje, considerar su
 tamaño.

In case of gasket's usage, consider
 its overall dimension.

Im Fall von Dichtungsverwendung,
 ihre Maße berücksichtigen.

En cas d'utilisation d'un joint, tenir
 compte de son encombrement