## 31.80215.22

## Hydraulic hinge VERTO VT 101E10 Outdoor

Material: aluminium


Finish: natural anodized EV1
Mounting: door at the bottom
Glass thickness: 8 - 13.52 mm


Sales unit (SU): St
Unit package: 1.00
Shape: square
Glass processing: Notch
Carrying capacity: 100 kg/pair


suitable for doors in indoor and protected outdoor areas, has 4 functions: regulation of the closing speed, adjustment of the end swing, 3-dimensional bearing adjustment and integrated brake against wind influences. Locking at  $0^{\circ}$  /  $+90^{\circ}$  /  $-90^{\circ}$ , automatic closing from  $+80^{\circ}$  and  $-80^{\circ}$ , max. door width 1000 mm, for temperatures from  $-15^{\circ}$ C to  $+50^{\circ}$ C








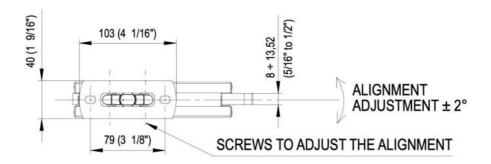

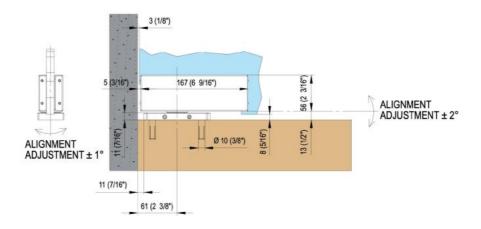

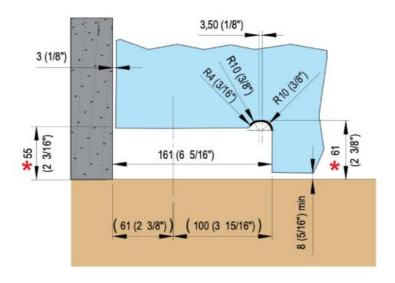

\* DISTANZA DA TERRA - DISTANCIA DESDE EL SUELO DISTANCE FROM THE FLOOR - ABSTAND VOM BODEN - DISTANCE AU SOL