## 31.80216.22

## Hydraulic hinge VERTO VT 101E10 NF Indoor


Material: aluminium

Finish: natural anodized EV1
Mounting: door at the bottom
Glass thickness: 8 - 13.52 mm

Sales unit (SU): St
Unit package: 1.00
Shape: square
Glass processing: Notch
Carrying capacity: 100 kg/pair


only suitable for indoor doors. Unica Indoor has 3 functions: regulation of the closing speed, adjustment of the end swing and 3-dimensional bearing adjustment. Locking at  $0^{\circ}$  /  $+90^{\circ}$  /  $-90^{\circ}$ , automatic closing from  $+80^{\circ}$  and  $-80^{\circ}$ , max. door width 1000 mm, for temperatures from  $-15^{\circ}$ C to  $+50^{\circ}$ C




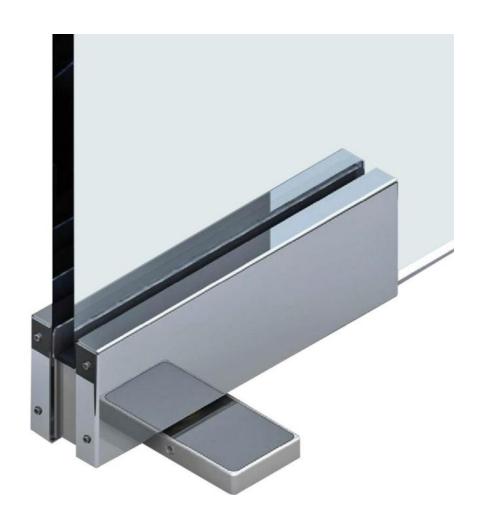






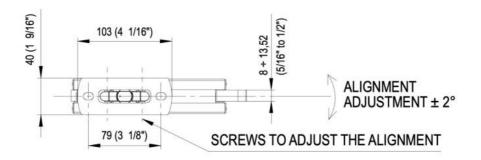

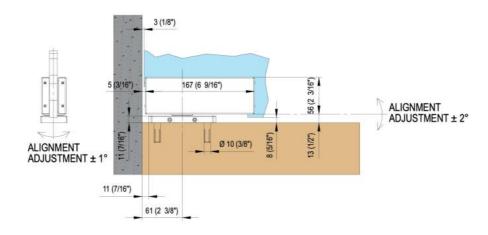

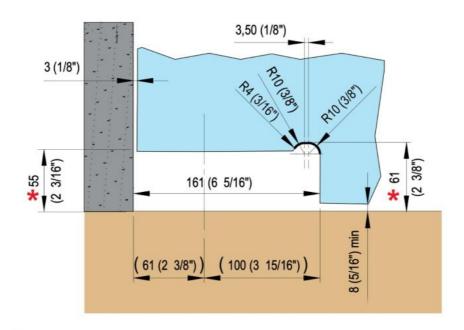

\* DISTANZA DA TERRA - DISTANCIA DESDE EL SUELO DISTANCE FROM THE FLOOR - ABSTAND VOM BODEN DISTANCE AU SOL