## 31.89110.27

## Hydraulic hinge Biloba BL 8911 with single-sided lug

Material: aluminium


Finish: BlackLine RAL 9005 matt


Mounting: glass/wall Glass thickness: 8 - 13.52 mm


Sales unit (SU): St
Unit package: 1.00
Shape: square
Carrying capacity: 100 kg/pair

infinitely adjustable in the zero position, concealed screw connection, with adjustable closing speed, with  $0^{\circ}$  / +90° / -90° detent, max. door width 1000 mm, automatic closing from +80° and -80°, for temperatures from -15°C to +40°C. Note: Forced opening above 95° could lever the door open, we recommend installing a door stopper



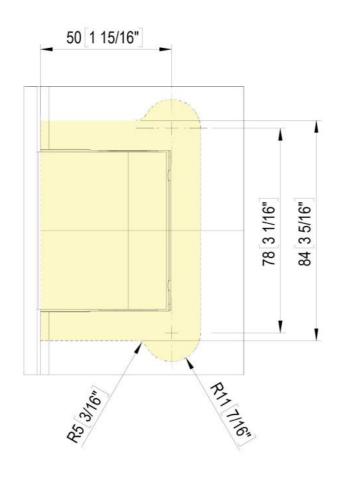

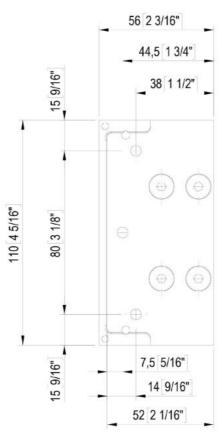



0°-Punkt-Regulierung Réglage du point 0 Regolazione del punto 0 Zero point adjustability

Einstellung Schliessgeschwindigkeit Réglage de la vitesse de fermeture Valvola di regolazione velocità chiusura anta Adjustment valve for the door's closing speed

