## 31.80110.24


## Hydraulic hinge Biloba BL 8011 with lug on one side


Material: aluminium
Finish: inox effect
Mounting: glass/wall
Glass thickness: 8 - 13.52 mm


Sales unit (SU): St
Unit package: 1.00
Carrying capacity: 100 kg/pair

zero position adjustment, with adjustable closing speed, with locking device  $0^{\circ}$  /  $+90^{\circ}$  /  $-90^{\circ}$ , automatic closing from  $+80^{\circ}$  and  $-80^{\circ}$ , max. door width 1000 mm, for temperatures from  $-15^{\circ}$ C to  $+40^{\circ}$ C. Note: Forced opening over  $95^{\circ}$  could lever out the door, we recommend the installation of a door stopper. For doors less than 500 mm wide, please use the hinge combination BL 8011 and BL 8011 SOL



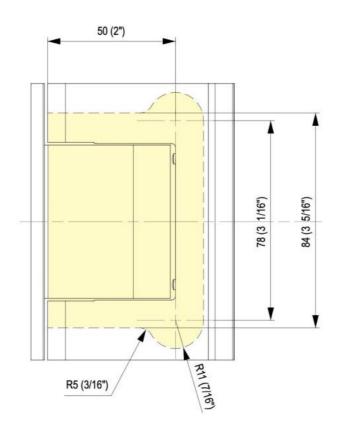

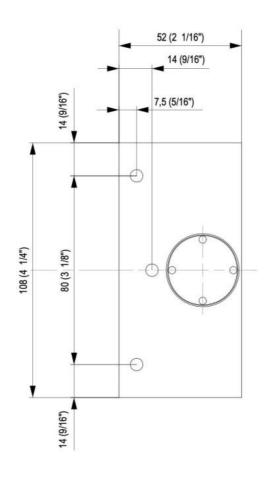

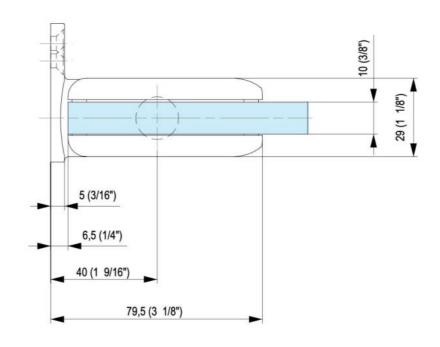

## Valvola di regolazione velocità chiusura anta Adjusment valve for the door's closing speed

