31.80215.21

Hydraulic hinge VERTO VT 101E10 Outdoor


Material: aluminium
Finish: chrome effect
Mounting: door at the bottom
Glass thickness: 8 - 13.52 mm


Sales unit (SU): St
Unit package: 1.00
Shape: square
Glass processing: Notch
Carrying capacity: 100 kg/pair


suitable for doors in indoor and protected outdoor areas, has 4 functions: regulation of the closing speed, adjustment of the end swing, 3-dimensional bearing adjustment and integrated brake against wind influences. Locking at 0° / $+90^{\circ}$ / -90° , automatic closing from $+80^{\circ}$ and -80° , max. door width 1000 mm, for temperatures from -15° C to $+50^{\circ}$ C








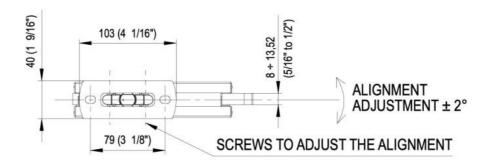

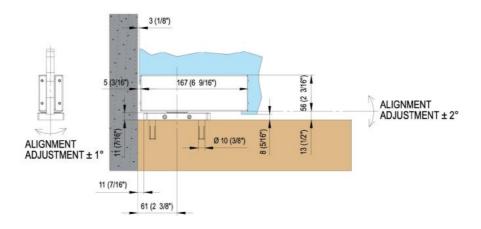

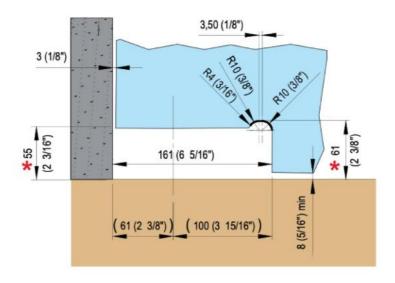

* DISTANZA DA TERRA - DISTANCIA DESDE EL SUELO DISTANCE FROM THE FLOOR - ABSTAND VOM BODEN - DISTANCE AU SOL