



## 31.80216.21



### Hydraulikscharnier Unica Indoor, Bodenmontage mit Bodenplatte ohne Bohrung

Material: aluminium  
Finish: chrome effect  
Mounting: door at the bottom  
Glass thickness: 8 - 13.52 mm  
Sales unit (SU): St  
Unit package: 1.00  
Shape: square  
Glass processing: Notch  
Carrying capacity: 100 kg/pair


only suitable for indoor doors. Unica Indoor has 3 functions: regulation of the closing speed, adjustment of the end swing and 3-dimensional bearing adjustment. Locking at 0° / +90° / -90°



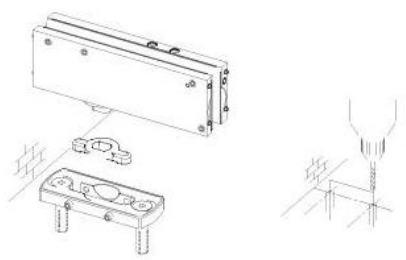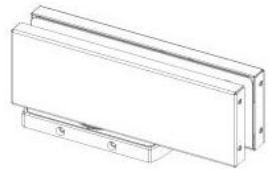

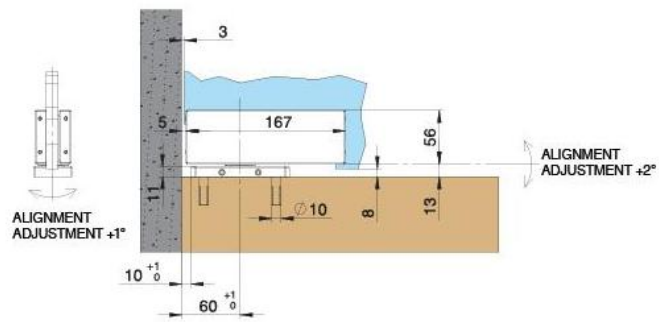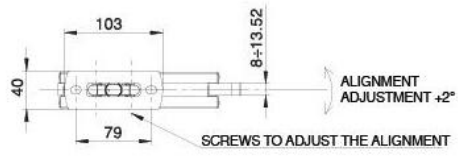


Standardmontage / Montage standard /  
Standard mounting

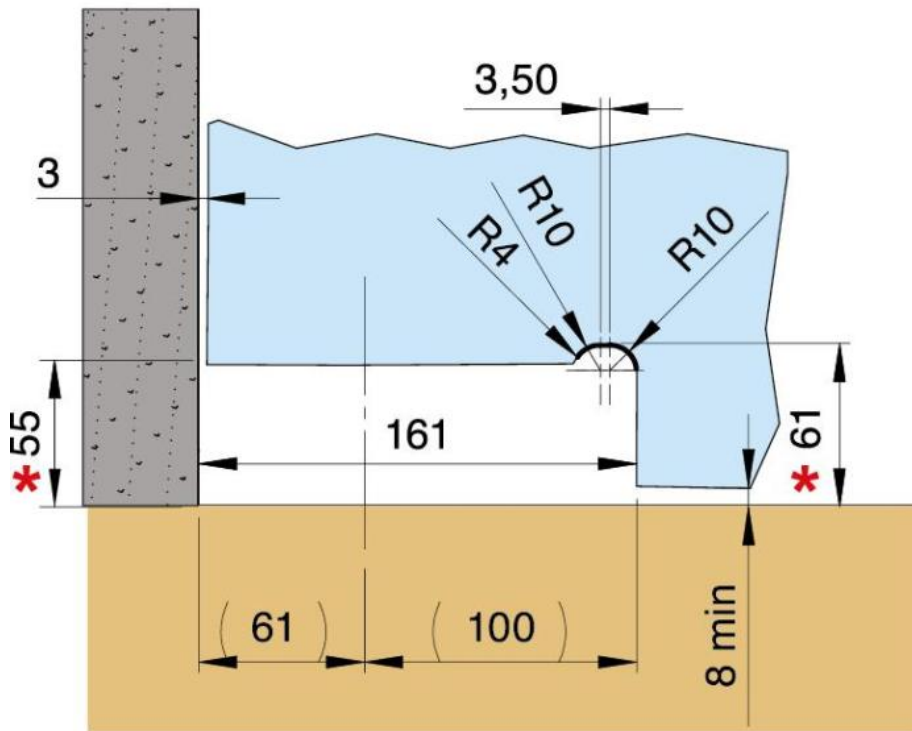

\* Abstand vom Boden / Distance au sol / Distance from the floor

Versetzte Montage / Montage déplacé /  
Displaced mounting

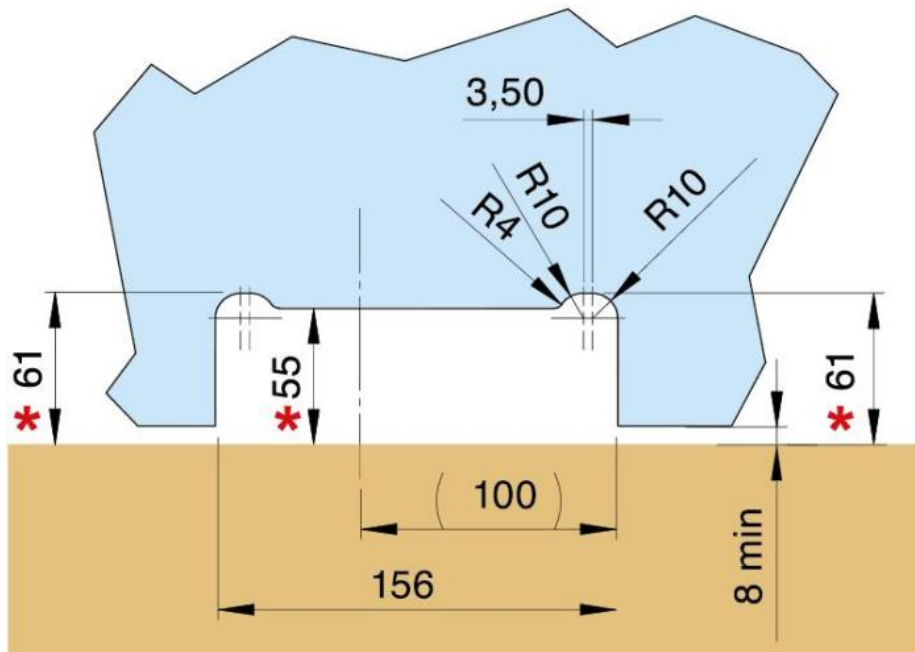

\* Abstand vom Boden / Distance au sol / Distance from the floor