31.80216.22

Hydraulic hinge VERTO VT 101E10 NF Indoor


Material: aluminium

Finish: natural anodized EV1
Mounting: door at the bottom
Glass thickness: 8 - 13.52 mm

Sales unit (SU): St
Unit package: 1.00
Shape: square
Glass processing: Notch
Carrying capacity: 100 kg/pair


only suitable for indoor doors. Unica Indoor has 3 functions: regulation of the closing speed, adjustment of the end swing and 3-dimensional bearing adjustment. Locking at 0° / $+90^{\circ}$ / -90° , automatic closing from $+80^{\circ}$ and -80° , max. door width 1000 mm, for temperatures from -15° C to $+50^{\circ}$ C




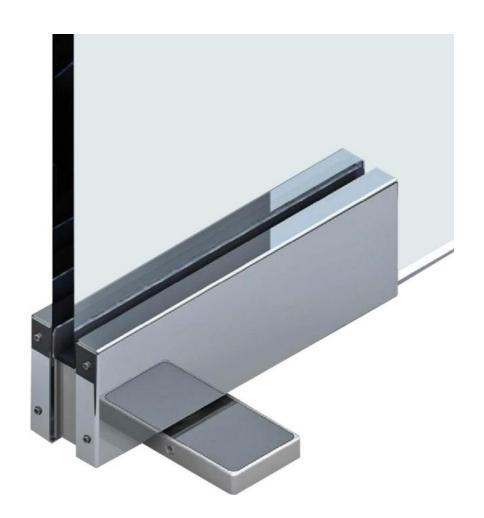






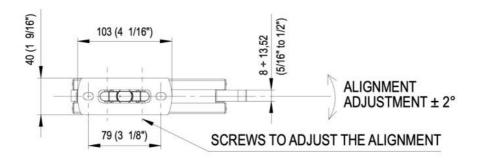

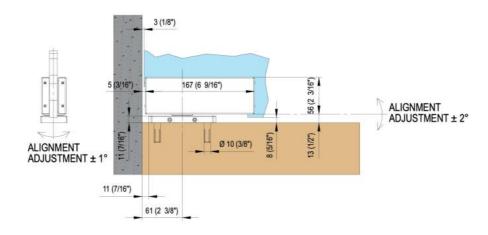

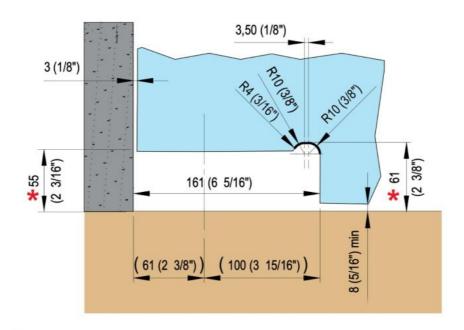

* DISTANZA DA TERRA - DISTANCIA DESDE EL SUELO DISTANCE FROM THE FLOOR - ABSTAND VOM BODEN DISTANCE AU SOL