

31.80302.27


Hydraulic hinge EVO EV 835E10 N with integrated door closer, self-closing from an opening angle of 80°


Material: aluminium
Finish: black anodized
Mounting: glass/wall, DIN left
Glass thickness: 8 - 19 / 21.52 mm
Sales unit (SU): St
Unit package: 1.00
Carrying capacity: 120 kg/pair

can be installed on doors with frame profile, rebate depth 30 - 50 mm, with adjustable closing speed, with constant braking control, with 90° and 180° locking, min. door width 800 mm, max. door width 1200 mm, for temperatures from -15°C to + 40°C. The hinge has a pre-tension, therefore a closing stop is required





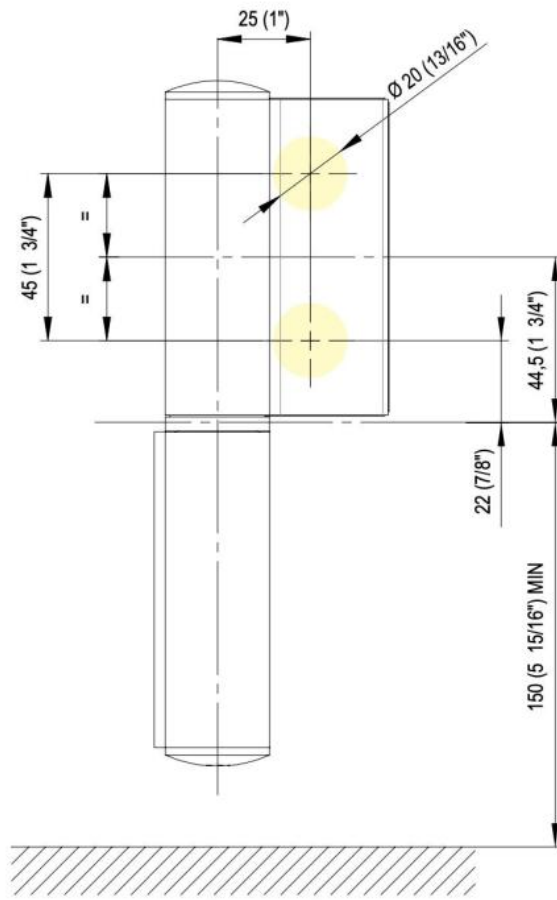

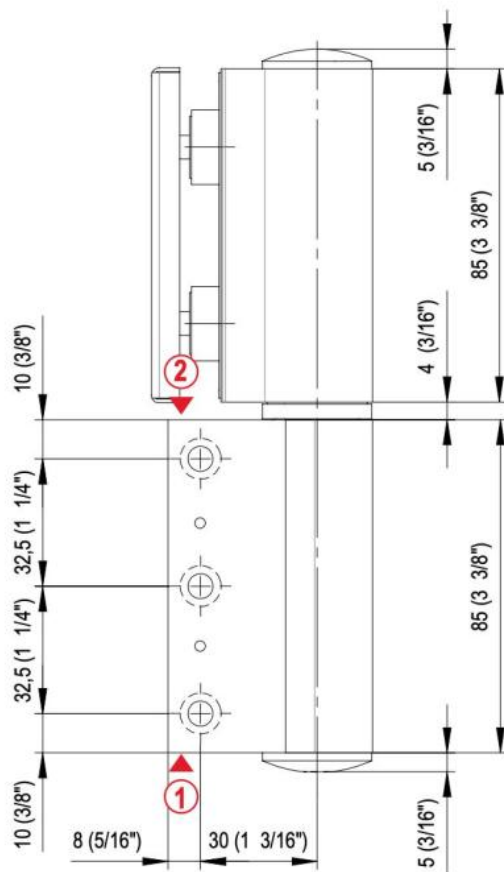


1



Regolazione scatto finale
Ajuste del resorte final
Final latch adjustment
Regulierung der Endschwung
R glage de verouillage final

2

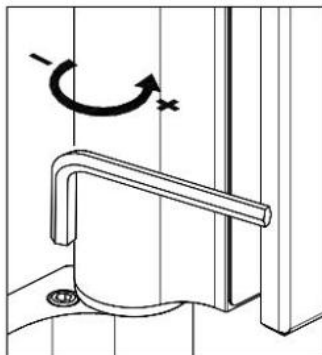

Regolazione della
velocit  di chiusura
Ajuste de la velocidad
de cierre
Closing speed adjustment
Regulierung der
Schlie geschwindigkeit
R glage de la vitesse
de fermeture

