



31.80217.21

Hydraulic hinge VERTO VT 101E10 SF Indoor, without locking


| | |
|--------------------|--------------------|
| Material: | aluminium |
| Finish: | chrome effect |
| Mounting: | door at the bottom |
| Glass thickness: | 8 - 13.52 mm |
| Sales unit (SU): | St |
| Unit package: | 1.00 |
| Shape: | square |
| Glass processing: | Notch |
| Carrying capacity: | 100 kg/pair |

suitable for doors in indoor, has 4 functions: regulation of the closing speed, adjustment of the end swing, 3-dimensional bearing adjustment and integrated brake. Automatic closing from +80° and -80°, max. door width 1000 mm, for temperatures from -15°C to + 50°C



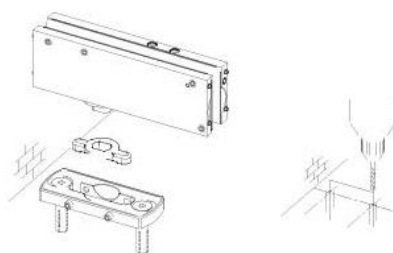


Standardmontage / Montage standard /
Standard mounting

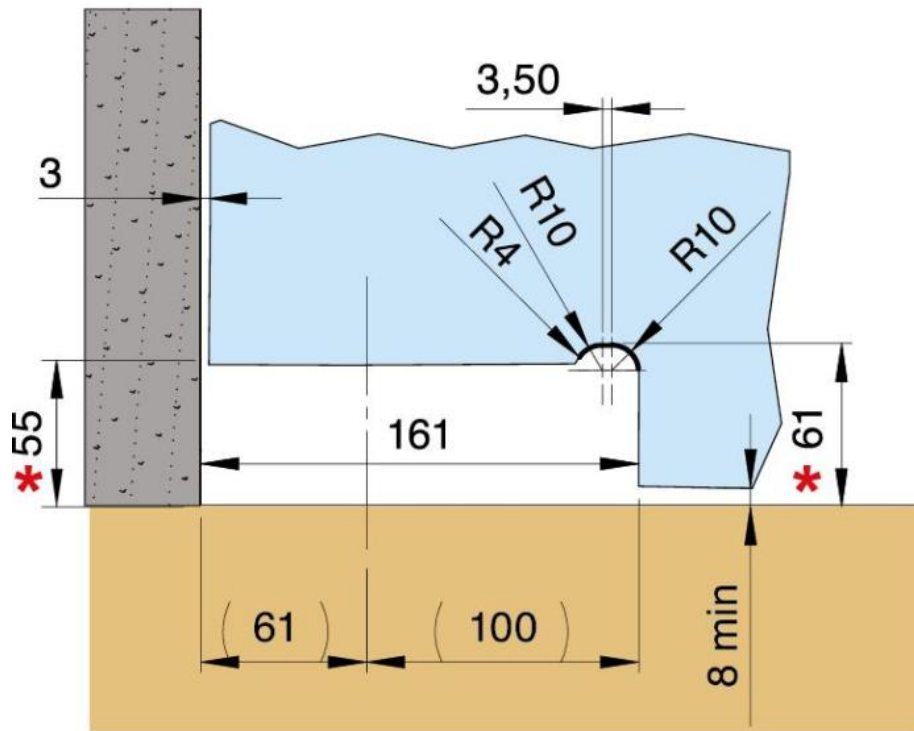

* Abstand vom Boden / Distance au sol / Distance from the floor

Versetzte Montage / Montage déplacé /
Displaced mounting

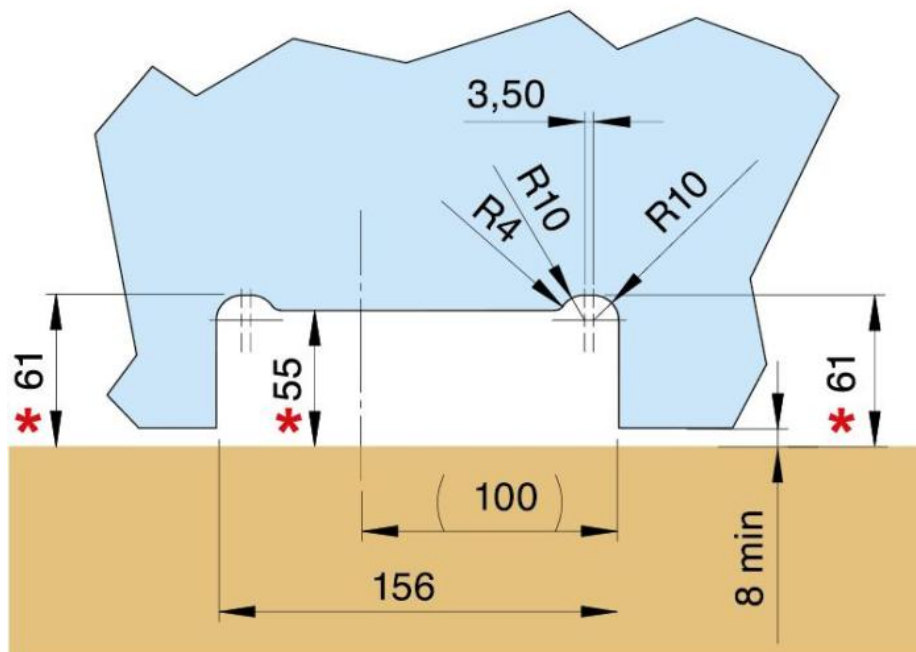

* Abstand vom Boden / Distance au sol / Distance from the floor