



31.80217.22

Hydraulic hinge VERTO VT 101E10 SF Indoor, without locking


Material:	aluminium
Finish:	natural anodized EV1
Mounting:	door at the bottom
Glass thickness:	8 - 13.52 mm
Sales unit (SU):	St
Unit package:	1.00
Shape:	square
Glass processing:	Notch
Carrying capacity:	100 kg/pair

suitable for doors in indoor, has 4 functions: regulation of the closing speed, adjustment of the end swing, 3-dimensional bearing adjustment and integrated brake. Automatic closing from +80° and -80°, max. door width 1000 mm, for temperatures from -15°C to + 50°C



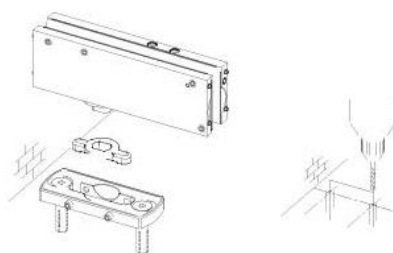


Standardmontage / Montage standard /
Standard mounting

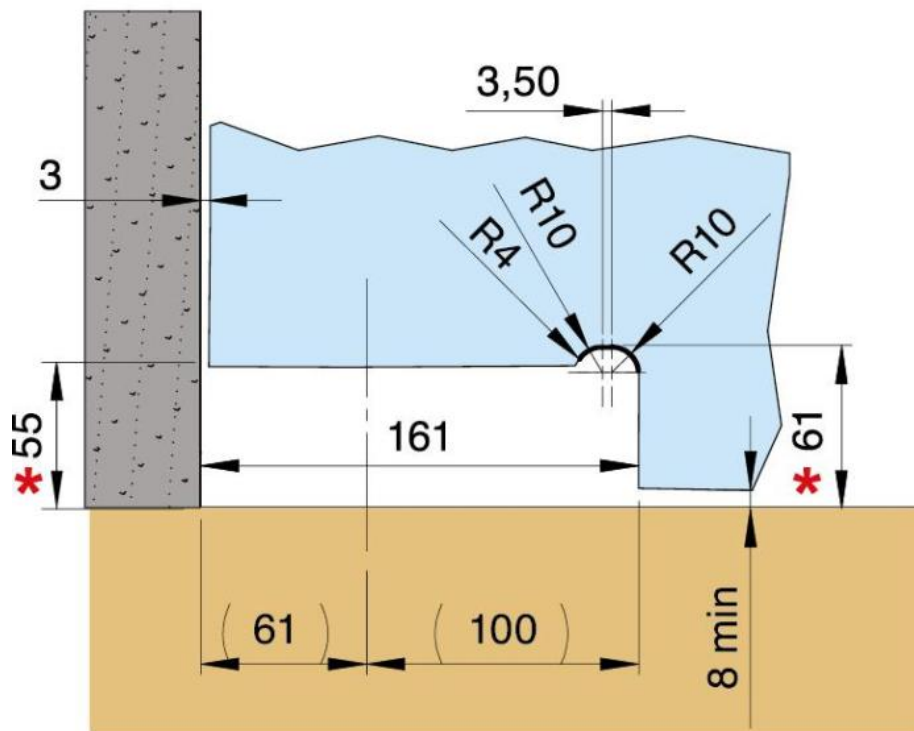

* Abstand vom Boden / Distance au sol / Distance from the floor

Versetzte Montage / Montage déplacé /
Displaced mounting

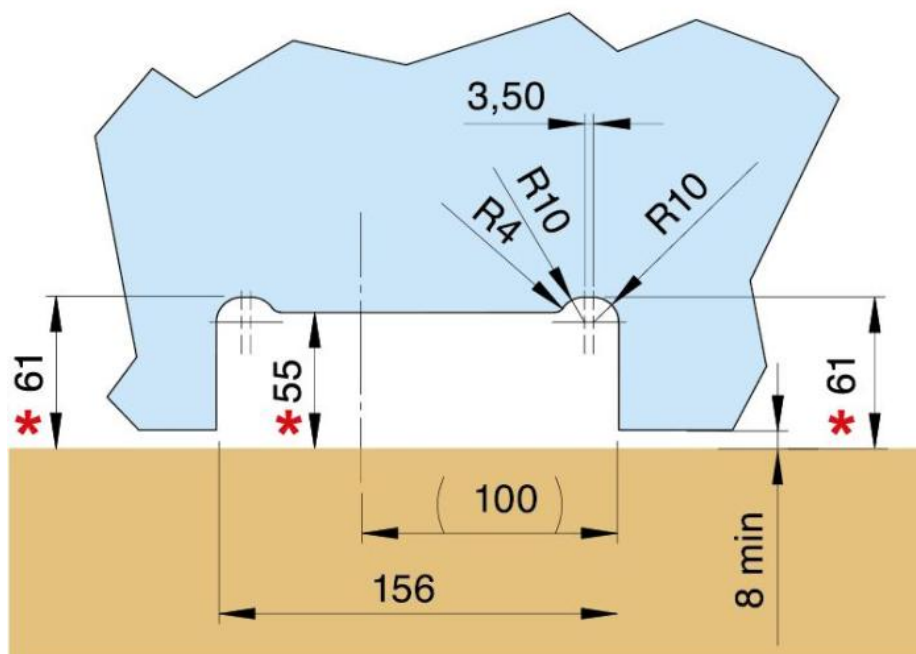

* Abstand vom Boden / Distance au sol / Distance from the floor