31.80217.22

Hydraulic hinge VERTO VT 101E10 SF Indoor, without locking

Material: aluminium


Finish: natural anodized EV1
Mounting: door at the bottom
Glass thickness: 8 - 13.52 mm


Sales unit (SU): St
Unit package: 1.00
Shape: square
Glass processing: Notch
Carrying capacity: 100 kg/pair


suitable for doors in indoor, has 4 functions: regulation of the closing speed, adjustment of the end swing, 3-dimensional bearing adjustment and integrated brake. Automatic closing from +80° and -80°, max. door width 1000 mm, for temperatures from -15°C to +50°C










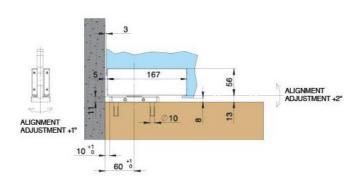


Standardmontage / Montage standard / Standard mounting

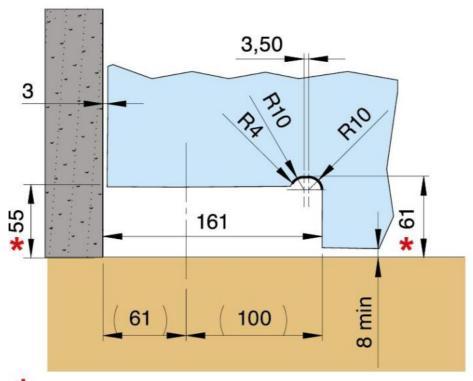

^{*}Abstand vom Boden / Distance au sol / Distance from the floor

Versetzte Montage / Montage déplacé / Displaced mounting

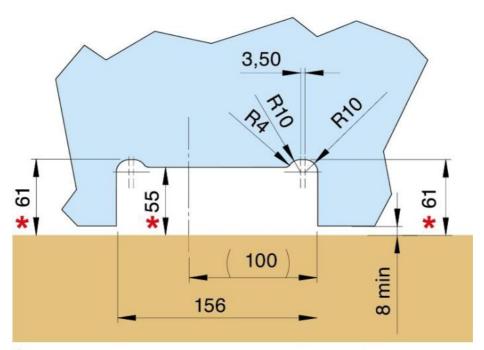

^{*}Abstand vom Boden / Distance au sol / Distance from the floor